



Space Saver® Electric Water Heaters

Designed for installations in cottages, offices, mobile homes or other applications where space is limited, the Space Saver® line of residential electric water heaters provides optimum reliability, performance and energy efficiency. With special features and a broad range of models and sizes, there is a GSW product to suit any application.

DESIGNED FOR PERFORMANCE

- Exclusive TankSaver® design
- Glass-lined tanks for longer life
- Meets latest energy efficiency standards
- Factory-installed plastic-lined nipples
- Patented Styropour® base for added energy efficiency
- Thermostatically controlled long life elements
- CFC-free foam insulation
- Personnel protector covers elements and controls

EASY TO INSTALL AND REPAIR


- Conveniently located T&P and drain valve
- Removable anodes

LIMITED TANK AND PARTS WARRANTY


Consult written warranty on the back of this sheet, with documentation included with water heater or contact GSW for complete warranty information.

EXCLUSIVE DESIGN


The exclusive TankSaver design works to prolong tank life. TankSaver impedes corrosion by guarding metal tank openings from exposure and keeping them watertight. The durable construction virtually eliminates rust.



Without TankSaver



With TankSaver

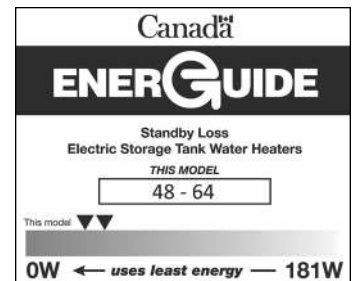




Space Saver® Electric Water Heaters

SPECIFICATIONS

Tank Warranty In Years**	Model	Capacity			Standby Loss WATTS	Elements		Dimensions			Shipping Weight LBS (KG)	BC Compliant
		IG	USG	LITRES		WATTS	VOLTS	A IN (CM)	B IN (CM)	C IN (CM)		
PLUG-IN SINGLE ELEMENT MODEL												
5	SS025SE15	2	2.5	10	N/A	1500	120	14 (36)	11 (28)	14 (36)	20 (9)	√
SIDE ENTRY SINGLE ELEMENT MODELS												
6	SS06SEB15	5	6	23	N/A	1500	120	15 ¼ (39)	14 ¼ (36)	N/A	35 (16)	√
6	SS06SEB30					3000	240					
6	SS12SEB15	9	12	43	N/A	1500	120	22 ¾ (58)	16 (41)	N/A	55 (25)	√
6	SS12SEB30					3000	240					
6	SS620SSEB-15K	14	19	65	51	1500	120	25 ½ (65)	19 (48)	N/A	65 (30)	√
6	SS620SSEB-30					3000	240					
6	SS630SSEB-15K	22	30	108	48	1500	120	30 (76)	22 (56)	N/A	90 (41)	√
6	SS630SSEB-30					3000	240					
TOP ENTRY DOUBLE ELEMENT MODELS												
6	SS640SDE-15K	30	40	143	54	1500	120	48 (122)	20 (51)	N/A	110 (50)	√
6	SS640SDE-30X					3000	208					
6	SS640SDE-30					3000	240					
LOWBOY TOP ENTRY DOUBLE ELEMENT MODELS												
6	SS630LDE-45	22	30	108	53	4500	240	31 (79)	22 (56)	N/A	98 (44)	-
6	SS640LDE-45	30	40	182	62	4500	240	33 ½ (82)	24 (61)	N/A	126 (57)	-
6	SS650LDE-45	40	50	182	64	4500	240	34 (84)	26 ½ (66)	N/A	162 (73)	-

**In Residential applications. Reduced warranty in Commercial applications. Parts warranted for 1 year.

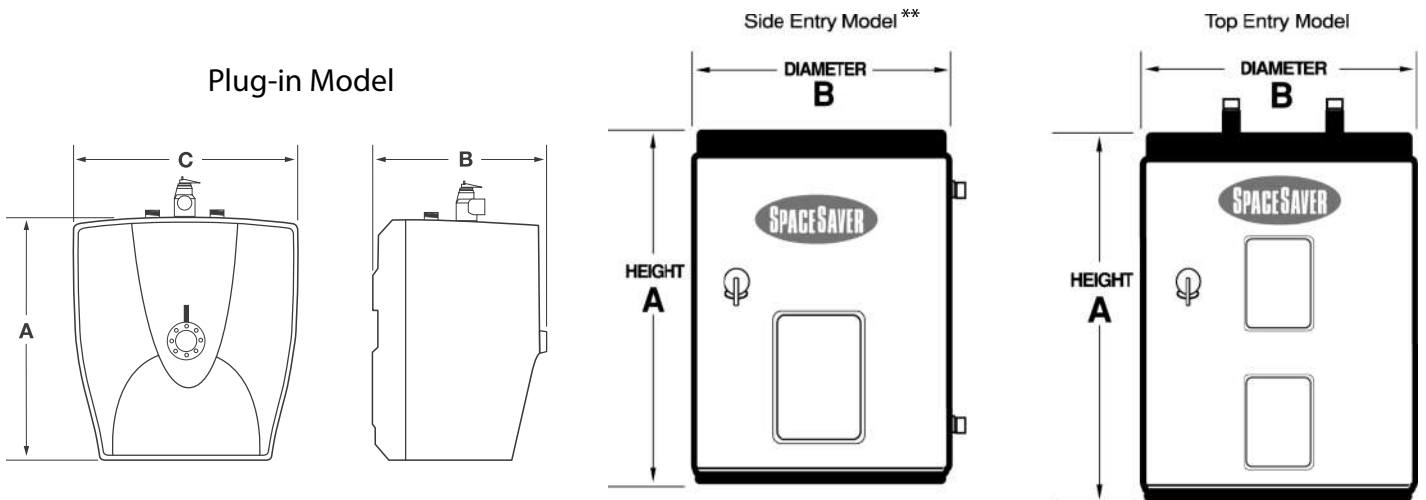

**Note: 6, 12 and 19 USG models have side connections on left hand side.